




# Technical Product Specifications

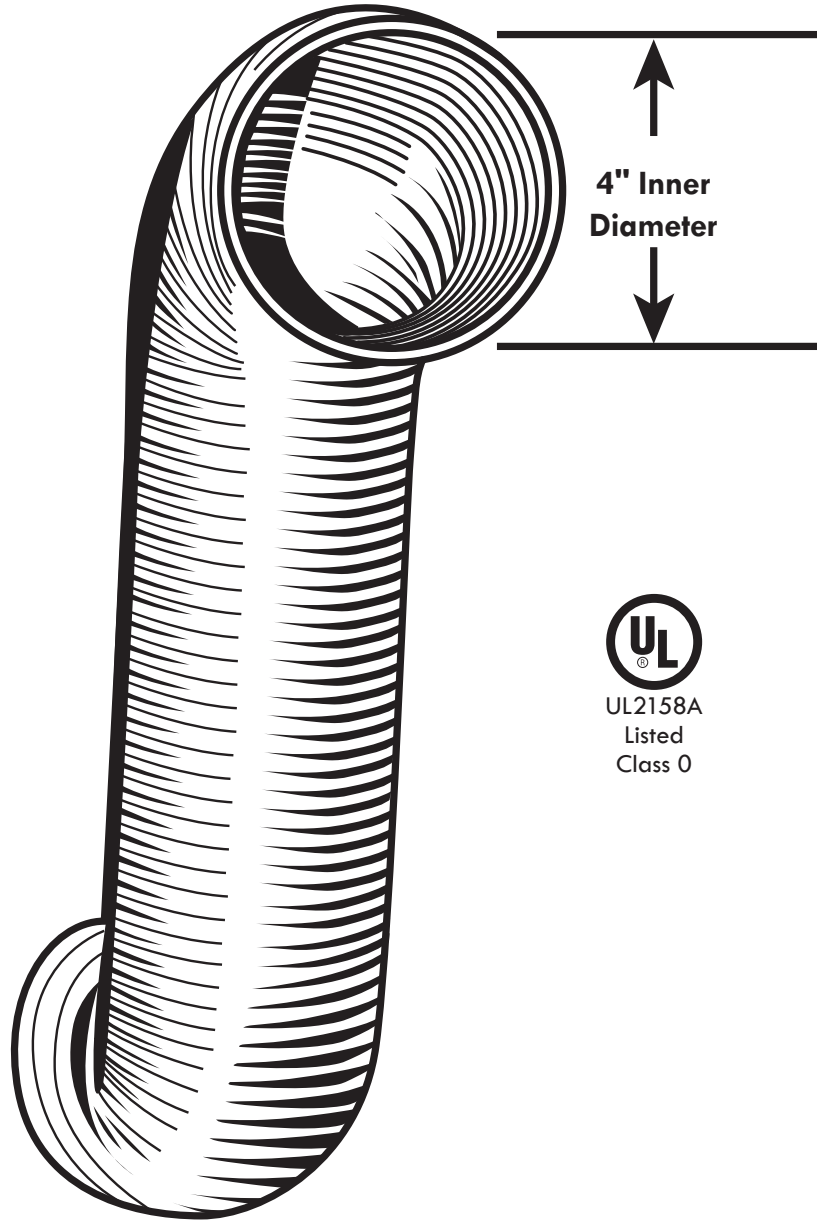

Model	Applications
<b>DFLX4</b>	Building code/manufacture approved 4" dryer transition duct 4' length
<b>DFLX8</b>	Building code/manufacture approved 4" dryer transition duct 8' length

### Performance Data

**For Use:**

- Dryer Exhaust Transition Hose
- Complies with IMC 504.4 & IRC 1502.3
- UL 2158A Class 0 Listed

**Material:**

- 5 layers of 25 micron 100% aluminum ribbon attached over galvanized zinc coated wire.

### General Information

**Benefits:**

- Simplifies connection of the dryer
- Helps protect against dangerous kinks / crushing
- Helps protect against flame spread
- Eliminates the need for a close elbow
- Improved efficiency shortens cycles, saves energy

**Features:**

- Maintains 4" Diameter Compressed or Extended
- Operating Temp: -22° — 482° (Tested to 662° F)
- Flame Spread: 0 / Smoke Developed: 0
- Crush & Puncture Resistant 100% Aluminum

### Manufactured By

**InOvate Technologies, Inc.**  
 250 S. Central Blvd. Suite 20  
 Jupiter, FL 33458  
 Telephone: 561-743-8696  
 Facsimile: 561-745-9723  
[www.DryerFlex.com](http://www.DryerFlex.com)